

MANUAL BOOK

XIYUE®

XY165

**HOT & COLD
WATER PURIFIER**



For safety and proper use,
Please refer to this user manual carefully.

TEST REPORT

(This Report is issued subject to the terms & conditions set out below)

SetSCO Services Pte Ltd
 531 Bukit Batok Street 23
 Singapore 659547
 Tel : (65) 6566 7777
 Fax: (65) 6566 7718
 www.setsco.com
 Business Reg No. 196900269D

Your Ref :

Date : 03/06/2025

Our Ref : EN8500365797/LWW

Page 1 of 1

Subject : Analysis of water sample submitted by **Night Stars Pte Ltd** on **26/05/2025** and testing commenced on **26/05/2025**.

Tested For : **Night Stars Pte Ltd**
 11 Woodlands Close
 #08-40
 Singapore 737853
 Attn : Ms Prisilla

Sample Reference : One (01) water sample was received.

Results

| Test Parameters | Units | Test Methods | Sample | Environmental Public Health (Water Suitable for Drinking) (No. 2) Regulations 2019 | WHO 2022 GV (4th Edition, 1st and 2 nd Addendum) |
|-----------------------------------|-----------|------------------------------------|---------|--|---|
| Total <i>E.coli</i> | cfu/100mL | APHA : Pt 9222H | <1 | <1 | <1 |
| Turbidity | NTU | APHA : Pt 2130B | <0.05 | 5 | - |
| Nitrite as NO ₂ -N | mg/L | APHA : Pt 4500-NO ₃ (I) | 0.035 | 0.9 | 0.9 |
| Total Chlorine as Cl ₂ | mg/L | Lovibond Test Kit | <0.2 | 5 | 5 |
| Cadmium as Cd | mg/L | APHA : Pt 3120B | <0.0012 | 0.003 | 0.003 |
| Mercury as Hg | mg/L | APHA : Pt 3112B | <0.0001 | 0.006 | 0.006 |
| Lead as Pb | mg/L | APHA : Pt 3125B | <0.01 | 0.01 | 0.01 |
| Chromium as Cr | mg/L | APHA : Pt 3120B | <0.003 | 0.05 | 0.05 |
| Magnesium as Mg | mg/L | APHA : Pt 3120B | 1.68 | - | - |
| Calcium as Ca | mg/L | APHA : Pt 3120B | 26.0 | - | - |
| pH value at 24.2°C | - | APHA : Pt 4500-H ⁺ (B) | 7.9 | 6.5 - 9.5 | - |
| Fluoride as F ⁻ | mg/L | APHA : Pt 4500-F (C) | 0.50 | 0.7 | 1.5 |

Remarks:

1. APHA is a Standard Method for the Determination of Water and Waste Water (APHA : 24th Edition : 2023).
2. The tested result applies only to the sample as received by the laboratory.
3. "<" = Not Detectable (The reported values are less than (<) the detection limits of the test methods).
4. Based solely on the parameters tested, the water sample passed WHO Guideline (2022).
5. Based solely on the parameters tested, the water sample passed EPH Guideline (2019).


 MARIVIE VIANA GAPUD
 SENIOR CHEMIST


 LEE WEI WAH
 SENIOR MANAGER

BIOLOGICAL AND CHEMICAL TECHNOLOGY DIVISION

Terms & Conditions:

- (1) The Report is prepared for the sole use of the Client and is prepared based upon the Item submitted, the services required by the Client and the conditions under which the Services are performed by SETSCO. The Report is not intended to be representative of similar or equivalent Services on similar or equivalent Items. The Report does not constitute an endorsement by SETSCO of the item.
- (2) SETSCO agrees to use reasonable diligence in the performance of the Services but no warranties are given and none may be implied directly or indirectly relating to the Services, the Report or the facilities of SETSCO.
- (3) SETSCO shall under no circumstances be liable to the Client or its agents, servants or representatives, in contract, tort (including negligence or breach of statutory duty) or otherwise for any direct or indirect loss or damage suffered by the Client, its agents, servants or representative howsoever arising or whether connected with the Services provided by SETSCO herein.
- (4) The Report may not be used in any publicity material without the written consent of SETSCO.
- (5) The Report may not be reproduced in part or in full unless approval in writing has been given by SETSCO.

NIGHT STARS

PP

POLYPROPYLENE SPRAY MELTING FIBER FILTER

Material : Use of a high quality polypropylene as the raw material, after heating and melting, spinning, traction and other processing method produced by the tubular PP cotton filter. Its shell is selected a food grade ABS plastic and ultrasonic welding process production.

Function: For the initial filtration of raw water is a general usage from the beginning of filtration. It is blocking the rusty water, sediment, eggs, colloidal, suspended substances and large particles of impurities. It is for a very good initial function for the future filter protection.

Applicable water quality: Municipal tap water (GB5749)
Use temperature: 5-45 degrees Celsius
Applicable pressure range: 0.1-0.4Mpa
Recommended replacement period: 12 months
This product's purified water producing is depends on the local water quality vary different.

Precautions:

- 1.The product must be installed by professionals, users do not install by themselves
- 2.Before installing this product, please make sure the water valve has closed.
- 3.Pay attention to the installation of the filter is in a correct direction.
- 4.This product should be replaced regularly to ensure water quality and safety.



I

NIGHT STARS

UDF

COCONUT CARBON FIBER FILTER

Material : Using of high grade coconut fiber to form a net structure in the cylinder, surrounded by food grade plastic shell.

Function : further reduce rusty water, sediment, eggs, colloidal, suspended substances and large particles of impurities, meanwhile absorb 99.9 percent of bacterial and virus as well as the bad taste of the water.

Applicable water quality: Municipal tap water (GB5749)
Use temperature: 5-45 degrees Celsius
Applicable pressure range: 0.1-0.4Mpa
Recommended replacement period: 12 months
This product's purified water producing is depends on the local water quality vary different.

Precautions:

- 1.The product must be installed by professionals, users do not install by themselves
- 2.Before installing this product, please make sure the water valve has closed.
- 3.Pay attention to the installation of the filter is in a correct direction.
- 4.This product should be replaced regularly to ensure water quality and safety.



II

NIGHT STARS

MMF

MINERAL FILTER

Material: Mineral filters typically add essential minerals like calcium and magnesium to water. These minerals not only enhance the water's taste but also contribute to its overall quality. Calcium and magnesium are known as "hard" minerals and can improve water's alkalinity and provide potential health benefits.

Function: adding mineral taste to the water make it naturally mineralised, overall improve the quality and the taste of the water.

Applicable water quality: Municipal tap water (GB5749)
Use temperature: 5-45 degrees Celsius
Applicable pressure range: 0.1-0.4Mpa
Recommended replacement period: 12 months
This product's purified water producing is depends on the local water quality vary different.

Precautions:

- 1.The product must be installed by professionals, users do not install by themselves
- 2.Before installing this product, please make sure the water valve has closed.
- 3.Pay attention to the installation of the filter is in a correct direction.
- 4.This product should be replaced regularly to ensure water quality and safety.



III

NIGHT STARS

T33

POST ACTIVATED CARBON FILTER

Material: The use of imported activate carbon as raw material, activated carbon high iodine value; the outer shell is selected with a food grade ABS plastic and by using an ultrasonic welding process production.

Function: Further adsorption of water abnormal color or odor, such as chlorine (bleaching powder), inhibition of bacterial regeneration, further to improve the water taste, to make the water quality sweet and delicious.

Applicable water quality: Municipal tap water (GB5749)
Use temperature: 5-45 degrees Celsius
Applicable pressure range: 0.1-0.4Mpa
Recommended replacement period: 12 months
This product's purified water producing is depends on the local water quality vary different.

Precautions:

- 1.The product must be installed by professionals, users do not install by themselves
- 2.Before installing this product, please make sure the water valve has closed.
- 3.Pay attention to the installation of the filter is in a correct direction.
- 4.This product should be replaced regularly to ensure water quality and safety.



IV

Product Feature

High-end And Stylish Super Slim Design at 13.5cm

Glass Panel And Touch Screen

Provides Drinking Water At 5 Different Temperatures

5 Stages Of Filtration

Easy & Self Replaceable Filter Cartridges With Filter Indication

AI Smart Instant Heating Technology

Ultra Low Power Consumption

Zero Hot Water Downtime, No Waiting



1

This Product Is Designed For A Voltage Of 220–240v ~
50–60hz. Using This Product In Countries With Different
Voltages May Result In Abnormal Performance.

2

Before Using This Product For The First Time,
Please Rinse The Filter Cartridge.

3

For The First Use, Continuously Press Cold Water To
Flush 2L Of Water For Initial Clean Purpose.

Product Manual

Product Information

| | |
|--------------------------|---|
| Safety Information | 2 |
| Parts Names | 3 |
| Product Diagram | 4 |
| Specifications | 5 |

Instructions For Use

| | |
|---------------------------------|----|
| Buttons And Indicators | 6 |
| How To Install | 10 |
| How To Replace The Filter | 11 |

SAFETY INFORMATION



CAUTION

Not Observing This Requirements May Induce Significant Injury Or Death .This Is To Prevent User Safety, Unforeseen Risks, And Property Damage

- **This product is for 220-240V~50-60Hz use only**
- **Do not use damaged or loose plugs or outlets**
- **Do not pull the power plug**
- **Do not install the product near inflammables, snowy or rainy spots or moist areas**
- **If the product is damaged or does not perform properly. do not arbitrarily disassemble,repair or modify the product**
- **Do not place the product near a electric heater**
- **Do not impact or exert excessive force on the product**
- **Do not install the product on slanted or unstable position**
- **Do not clean the product by spraying water or wiping the product with benzene or thinner**
- **Install the length of the input water hose connected to the product at or below 5m from the water supply valve**

Unplug the power cable and lock the supply water valve
before relocation the machine

SAFETY INFORMATION



CAUTION

This Product Is For 220–240v~50–60hz Use Only

Make sure to connect the power plug to a grounded 220–240V exclusive outlet. The water purifier works only when the power is connected

- **Connect supply water and drain water hose properly**

- **Open the supply water valve**

For the first use, continuously press cold water to flush 2L of water for initial clean purpose

- **Case of turned off the display lamp on the display part**

If the display lamp is turned off, please check if the power is out.


- **Filter replacement regularly**

Regular filter changes are very important to drink clean water. When using the filters, the performance of the water purifier will decrease, so don't miss the filter change period

Note!

When not using the product for a long time,
Disconnect the power plug and close the supply water valve

PARTS NAME

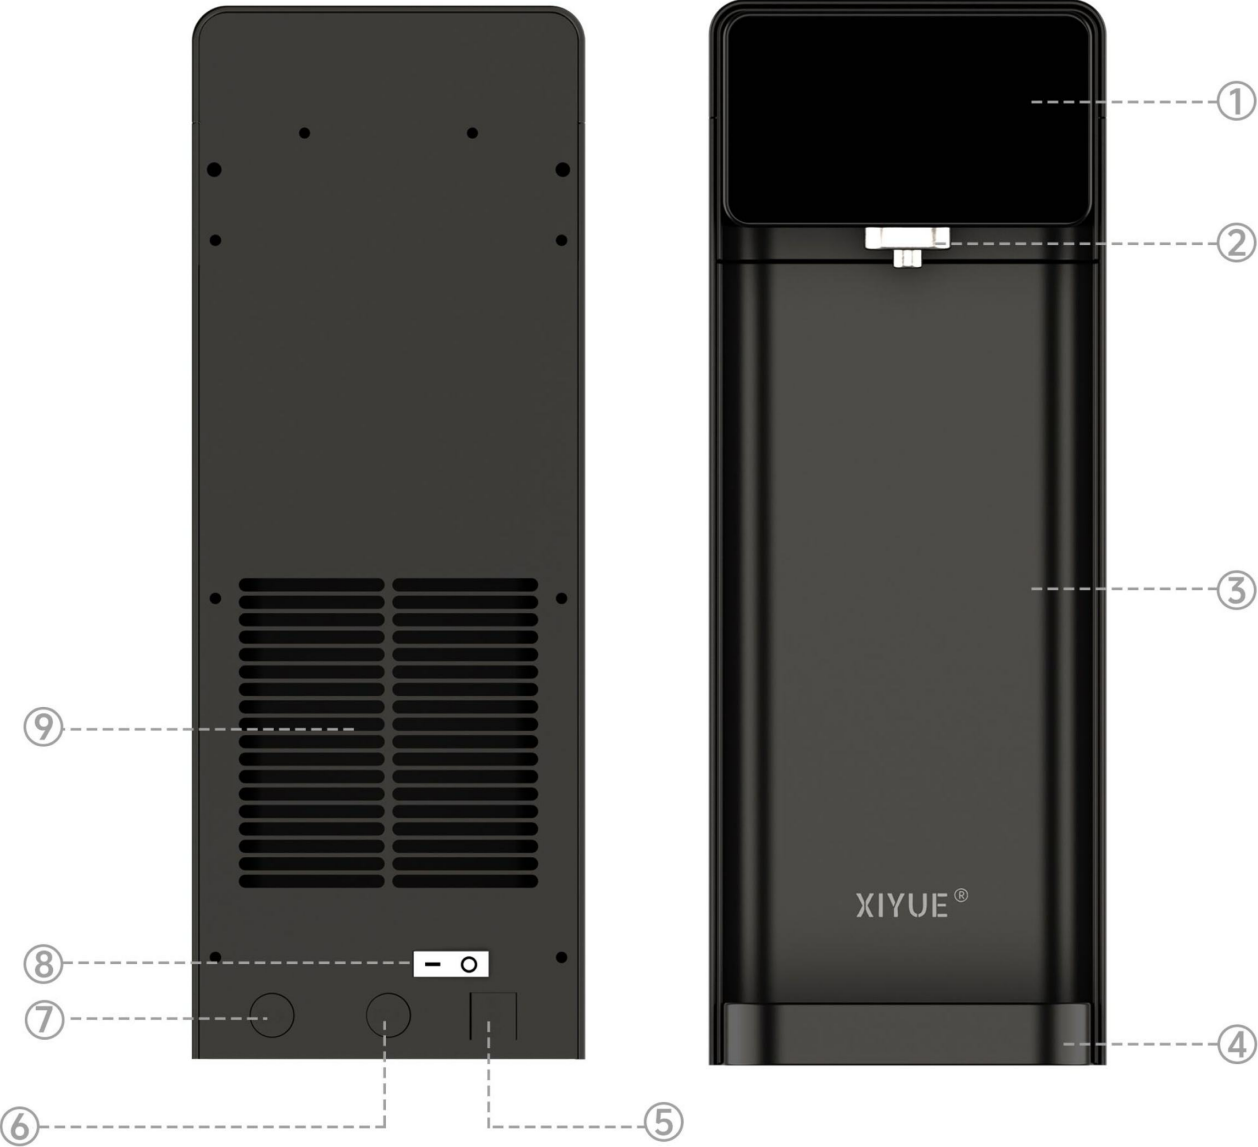

-
- | | | | | |
|-----------------|----------|----------------|--------|---------|
| ① Control Panel | ② Nozzle | ③ Filter Cover | ④ Tray | ⑤ Power |
|-----------------|----------|----------------|--------|---------|
-
- | | | | |
|----------|---------|---------------------|------------|
| ⑥ Outlet | ⑦ Inlet | ⑧ Cold Water Switch | ⑨ Air Vent |
|----------|---------|---------------------|------------|
-


PRODUCT DIAGRAM



SPECIFICATIONS

| Model | XY165 |
|---|------------------|
| Function | Cold/Ambient/Hot |
| Hot Water Temperature | 45,65,up to 100 |
| Heating Power | 2200W |
| Cold Water Tank Capacity | 0.8L |
| Cooling Power | 0.8L/H |
| Net Water Flow Rate | 0.26L/Min |
| Filtration Method | PAC-UF |
| Water Source | Tap Water |
| Inlet Pressure | 0.1-0.4 Mpa |
| Applicable Surrounding Temperature | 4-43°C |
| Rated Total Net Water Volume | 2000L-3000L |
| Rated Voltage/Frequency | 220-240V~50-60Hz |

BUTTONS & INDICATORS

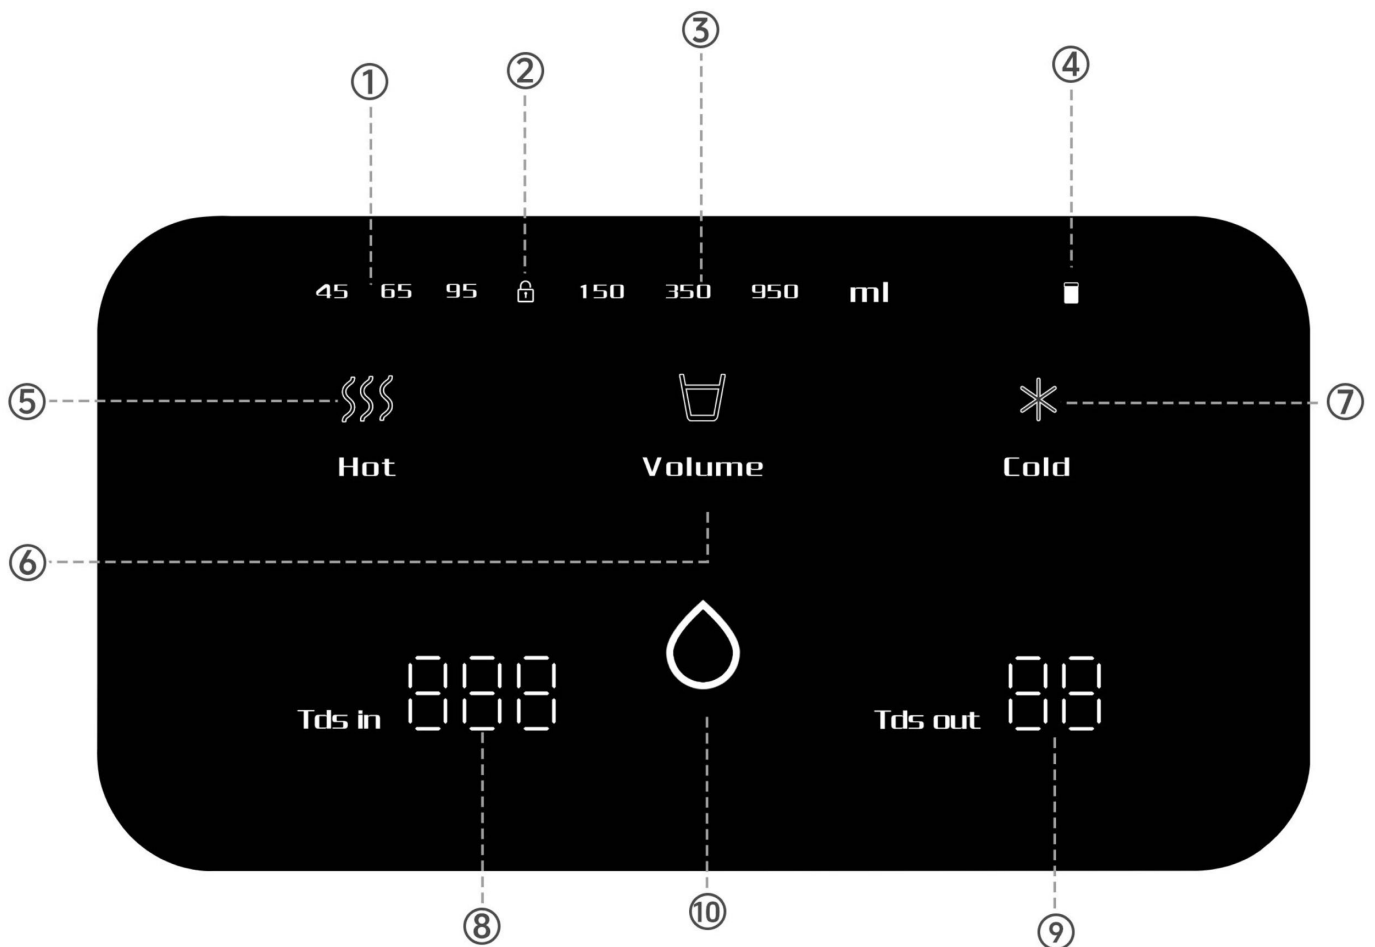

① Temperature Display

② Child Lock

③ Volume Display

④ Filter Indicator

⑤ Hot Water

⑥ Volume

⑦ Cold Water

⑧ Inlet TDS

⑨ Outlet TDS

⑩ Dispense

BUTTONS & INDICATORS



Hot Water Function

**Press “Hot” To Choose Temperature,
Press “Dispense” To Dispense Water.**

1. Normal Mode: Press “hot” to choose temperature,
Press “dispense” to dispense water.

2. Child lock Mode: Long press “hot” for 5 second to unlock
95 degree hot water, long press “hot” for 5 second
to lock 95 degree hot water again.

3. Ambient Water Function

Press “dispense” to directly dispense ambient water.



Cold

**Cold Water Function Press “Cold” ,
press “dispense” to get cold water.**



Filter Indication

When filter signal start to blink, its time for filter replacement.

When filter is changed,
press and hold “volume” and “cold” for 5 second
to reset the filter indication.



Working Status Indicator



Child Lock



Hot



Volume




Cold



Dispense



HOW TO INSTALL

Installation Guide

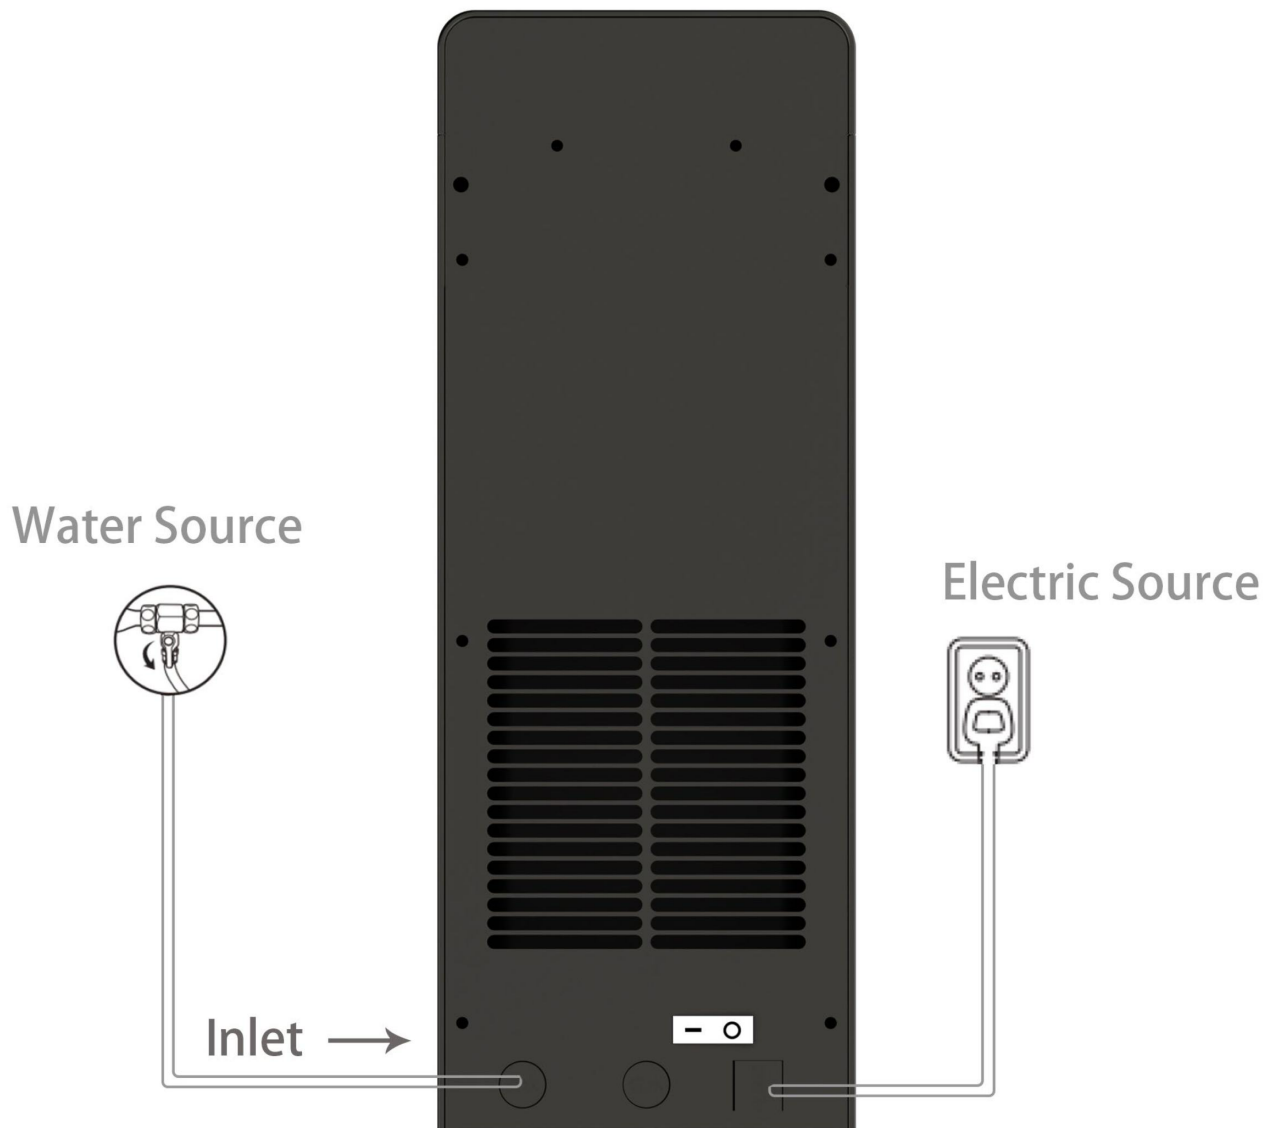

HOW TO REPLACE THE FILTER

1. Off Water Valve

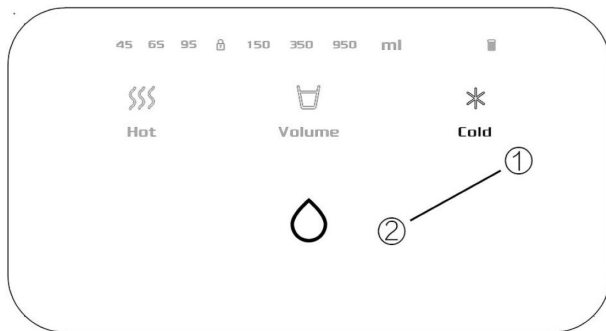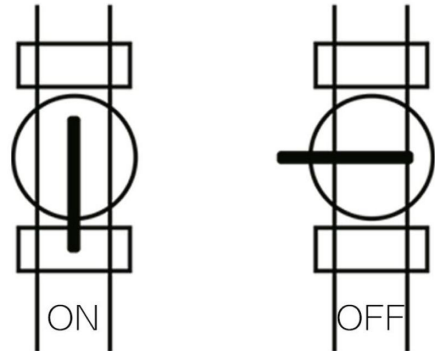

2. Release Pressure
Dispense Cold
Water Until Auto Stop

3. Remove Filter
Cover, Pull Out Filter,
Install New Filter

